




Thermowell

TYPE LOK

With clamping ring



- Thermowells are used in containers, tanks and pipelines for installation/replacement of sensors without having to drain or evacuate the process.
- Material for thermowell is stainless steel AISI 316L.
- Pressure certificate up to 75 bars is available.
- Immersion sheath $\varnothing 12/\varnothing 11/\varnothing 9$ with wall thickness of 1 mm.
- Rated torque: 50 Nm.

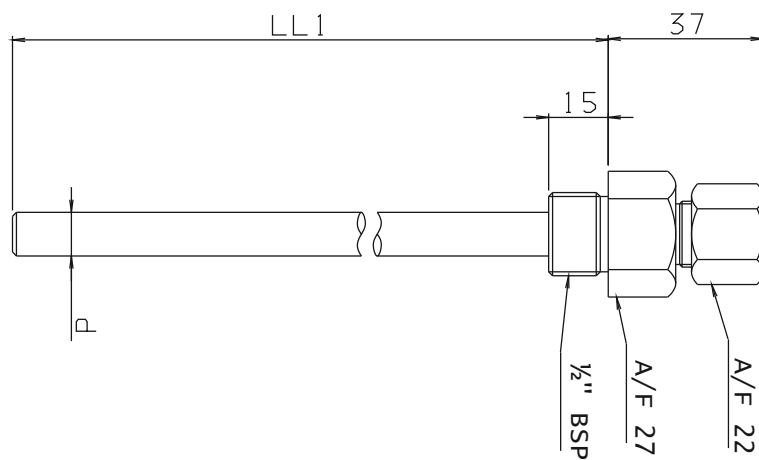

Ordering: See ordering form on back page



ORDERING FORM / THERMO COUPLE TYPE LOK


Type LOK

Thermowell - Imm./LL1/ mm

Min. 40 mm -
max. 500 mm
Optional length

Sheath dia./Wall thickn./mm - Sensor dia.

12×1 - Ø9
11×1 - Ø8
9×1 - Ø6

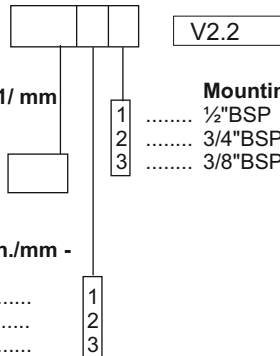

Mounting thread - outside

..... 1/2" BSP
..... 3/4" BSP
..... 3/8" BSP

Head office:

Senmatic A/S
Industrivej 8, 5471 Søndersø, Denmark
Phone: +45 64 89 22 11
dk@senmatic.com - www.senmatic.com