

SMALL COMPACT THERMOSTAT

STO 011 / STS 011



- > Thumbwheel setting dial
- > Small hysteresis
- > High switching capacity
- > Anti frost assurance
- > Optimized housing for better air flow


The mechanical thermostat is a two state regulator with small hysteresis. The setting wheel has an anti frost assurance. The housing ensures an optimized air circulation around the bimetal.

STO 011: Thermostat (NC); contact breaker for regulating heaters. The contact opens when temperature is rising.


STS 011: Thermostat (NO); contact maker for regulating of filter fans and heat exchangers or for switching signal devices when temperature limit has been exceeded. The contact closes when temperature is rising.














The anti frost assurance is a symbol on the setting scale of the NC thermostat (STO 011) at +11 °C. This setting assures closing of the switching contact before 0 °C.

TECHNICAL DATA

Switch temperature difference	4 K (±3 K tolerance)	
Sensor element	thermostatic bimetal	
Contact type	snap-action contact	
Service life	> 100,000 cycles	
Max. switching capacity	AC 250 V, 10 (2) A / AC 120 V, 15 (2) A DC 30 W at DC 24 V to DC 72 V	
Max. inrush current	AC 16 A for 10 sec.	
Connection	2-pole terminal, clamping torque 1 Nm max.: rigid/stranded¹ wire 2.5 mm² (AWG 14)	
Mounting	clip for 35 mm DIN rail, EN 60715	
Casing	plastic according to UL94V-O, light grey	
	plastic according to 01344-0, light grey	
Dimensions	70 x 33 x 42 mm	
Dimensions Weight		
	70 x 33 x 42 mm	
Weight	70 x 33 x 42 mm approx. 50 g	
Weight Fitting position	70 x 33 x 42 mm approx. 50 g variable	
Weight Fitting position Operating/Storage temperature	70 x 33 x 42 mm approx. 50 g variable -45 to +80 °C (-49 to +176 °F)	

¹ When connecting with stranded wires, wire end ferrules must be used.


Important note: The contact system of the regulator is subjected to environmental influences, thus the contact resistance may change. This can lead to a voltage drop and/or self-heating of the contacts.



Connection diagrams

SSS Heater

Filter fan, Cooling equipment, Signal device

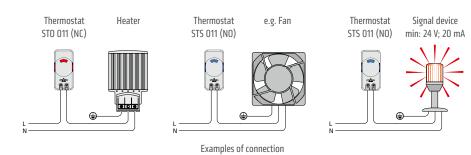

Setting range	Art. No. Contact breaker (NC)	Art. No. Contact maker (NO)
0 to +60 °C	01115.0-00	01116.0-00
+32 to +140 °F	01115.9-00	01116.9-00