




Resistance thermometer TYPE PTI

For insertion



- Insertion thermometer - for measurement of temperatures in e.g. meat and fruit.
- Measuring inset according to IEC 751, standard Cl. B 1/6 DIN.
- Protective sheath of 6 mm stainless steel, length 75 mm.
- The connection cable is standard a 4 cond. neopren cable, Ø9 mm. Ø6 teflon cable for super freeze.
- Standard without connection box. Available with a white-enamelled marine box of light-alloy metal, protection IP 67.
- Response time: (mean values) measured at velocities in:
water at 0.4 m/s: $\tau_{0.5} = 7$ sec.
- Recommended measuring current: max. 2 mA.

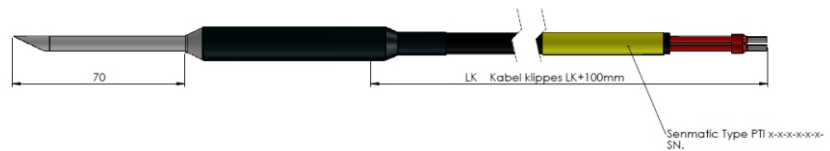

Ordering: See ordering form on back page



ORDERING FORM / RESISTANCE THERMOMETER TYPE PTI

Type PTI

Type

PTI Ø6 standard
PTI Ø6 super freeze ...



Cable length LK

Min. 2500 mm
max. 15000 mm


Connection

None
Box
Cannon plug
Deutsch plug

1
2
3
4

Toleranceclass/DIN
... Cl. 1/6 B ±0,05°C

Connection diagram:



Head office:

Senmatic A/S
Industrivej 8, 5471 Søndersø, Denmark
Phone: +45 64 89 22 11
dk@senmatic.com - www.senmatic.com